


KIHU MWIRI SUB- BRANCH PROFILE

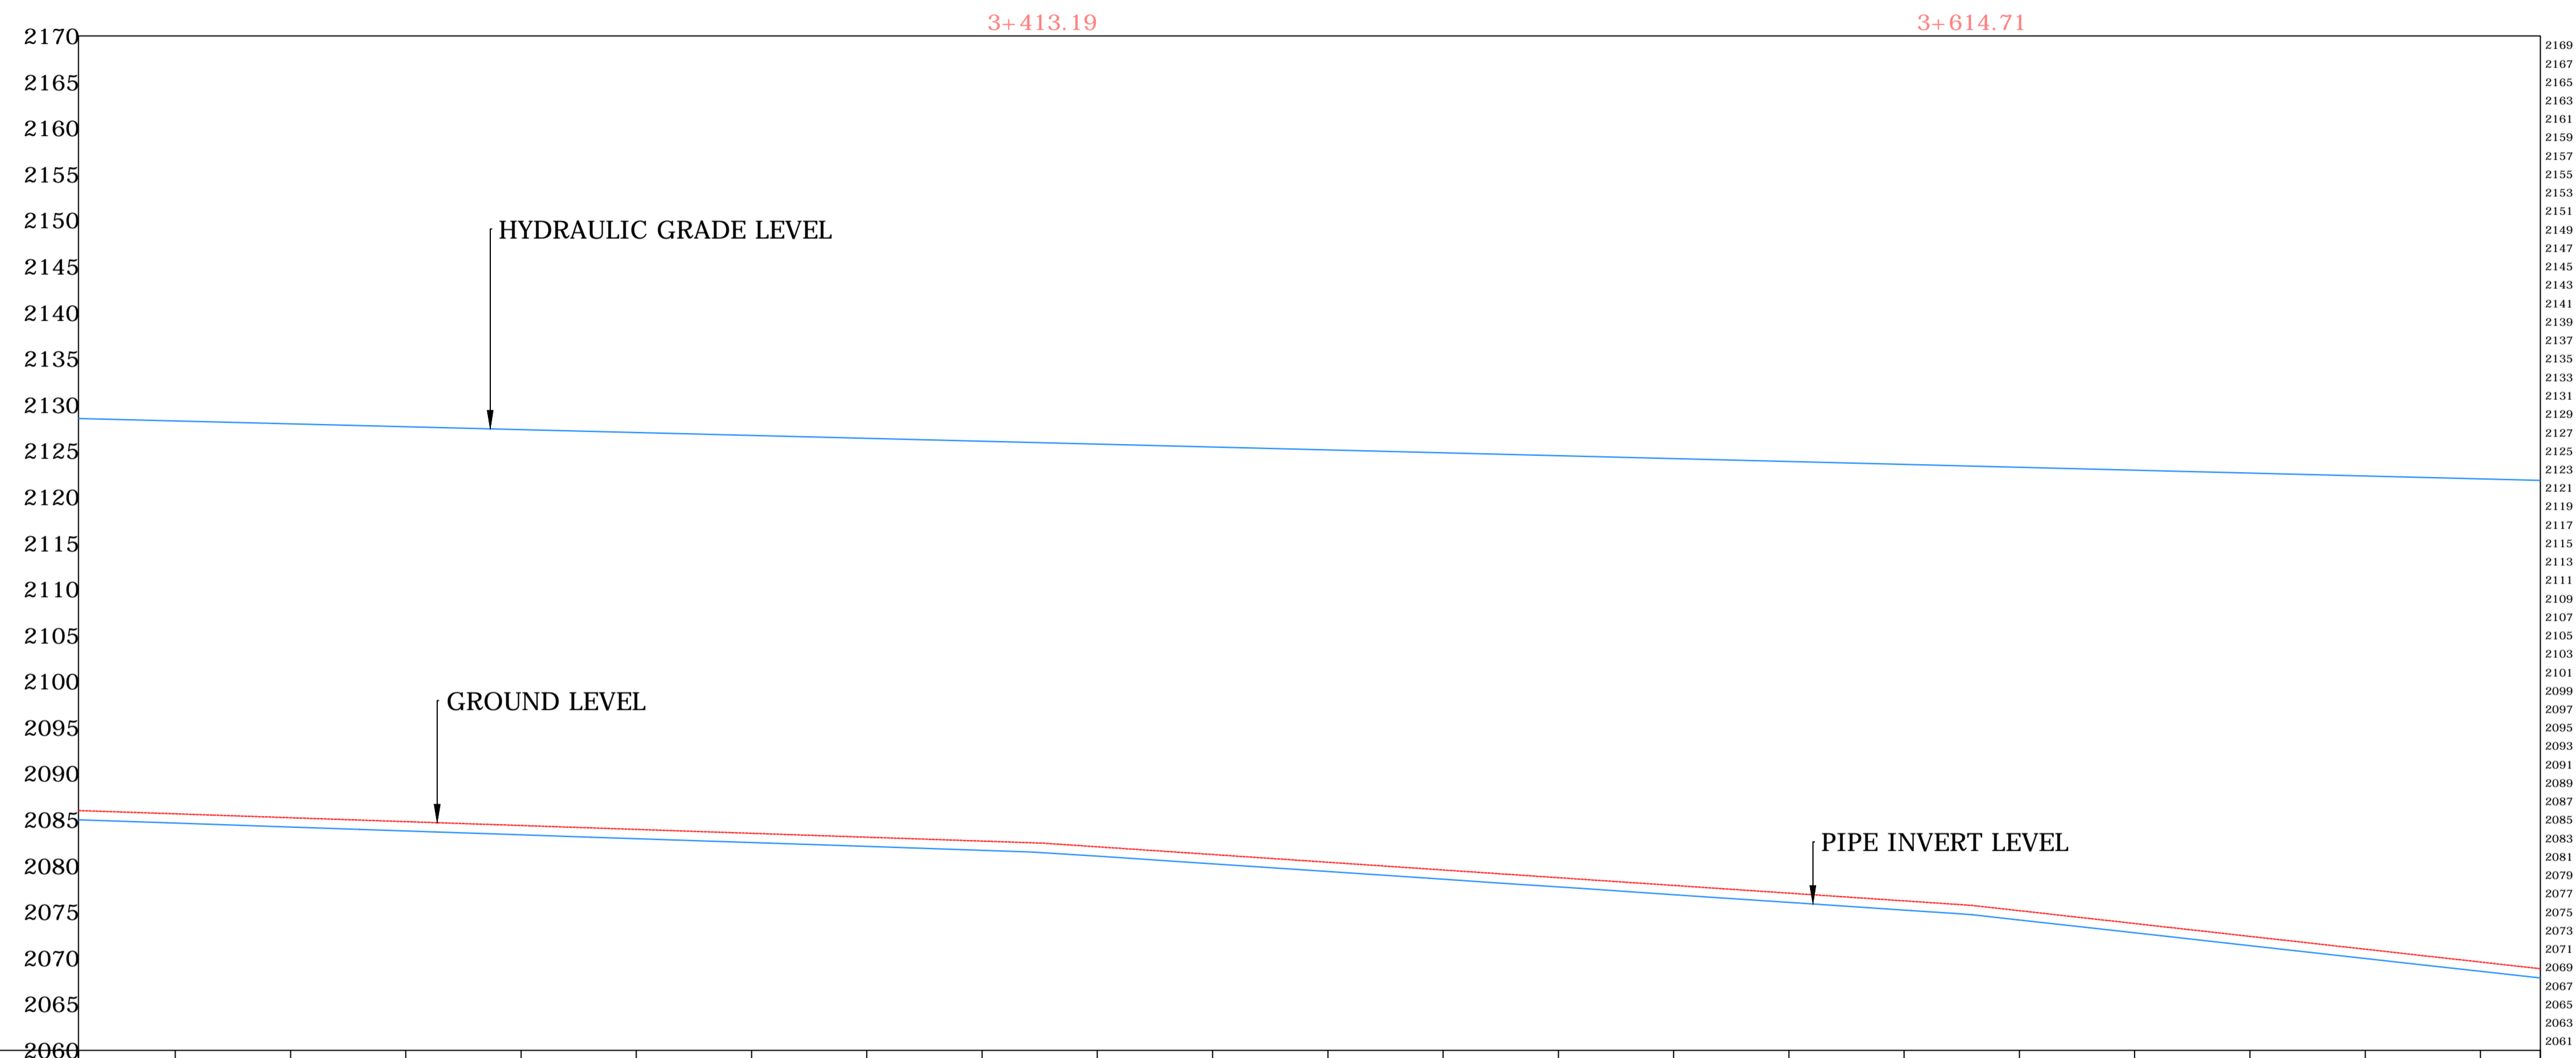

CHAINAGE	2128.52	2128.52	2127.94	2127.63	2127.31	2127.00	2126.68	2126.37	2126.05	2125.74	2125.42	2125.11	2124.79	2124.48	2124.16	2123.85	2123.53	2123.22	2122.90	2122.59	2122.27	2121.96	2121.79
ORIGINAL GROUND LEVEL	2086.00	2085.65	2085.22	2084.80	2084.38	2083.96	2083.53	2083.11	2082.69	2082.07	2081.23	2080.40	2079.56	2078.72	2077.88	2077.05	2076.21	2075.14	2073.75	2072.36	2070.97	2069.58	2068.85
PIPE INVERT LEVEL	2085.00	2084.64	2084.22	2083.80	2083.37	2082.95	2082.53	2082.11	2081.69	2081.06	2080.23	2079.39	2078.55	2077.72	2076.88	2076.04	2075.20	2074.14	2072.75	2071.36	2070.96	2069.57	2068.85
HYDRAULIC GRADE LEVEL	2128.52	2128.26	2127.94	2127.63	2127.31	2127.00	2126.68	2126.37	2126.05	2125.74	2125.42	2125.11	2124.79	2124.48	2124.16	2123.85	2123.53	2123.22	2122.90	2122.59	2122.27	2121.96	2121.79
FLOW PARAMETERS	0.00216M ³ /S																						
PIPE INFO	UPVC PN 16 63MM																						
SURVEY REMARKS																							

General Notes

No.	Revision/Issue	Date

Firm Name and Address
 MINISTRY OF AGRICULTURE,
 LIVESTOCK, FISHERIES & IRRIGATION
 NATIONAL IRRIGATION BOARD
 SURVEYED BY : VIRGINIA.W.
 DRAWN BY : VIRGINIA.W.
 DESIGNED BY : MR J.W.MUCHINA.
 CHECKED BY : C.M.M.

Project Name and Address
 NYAMUGUNA IRRIGATION
 PROJECT
 LAIKIPIA COUNTY
 LAIKIPIA EAST SUB-COUNTY

Project KIHU MWIRI BRANCH	Sheet 7
Date FEB.2019	
Scale 1:1000	