
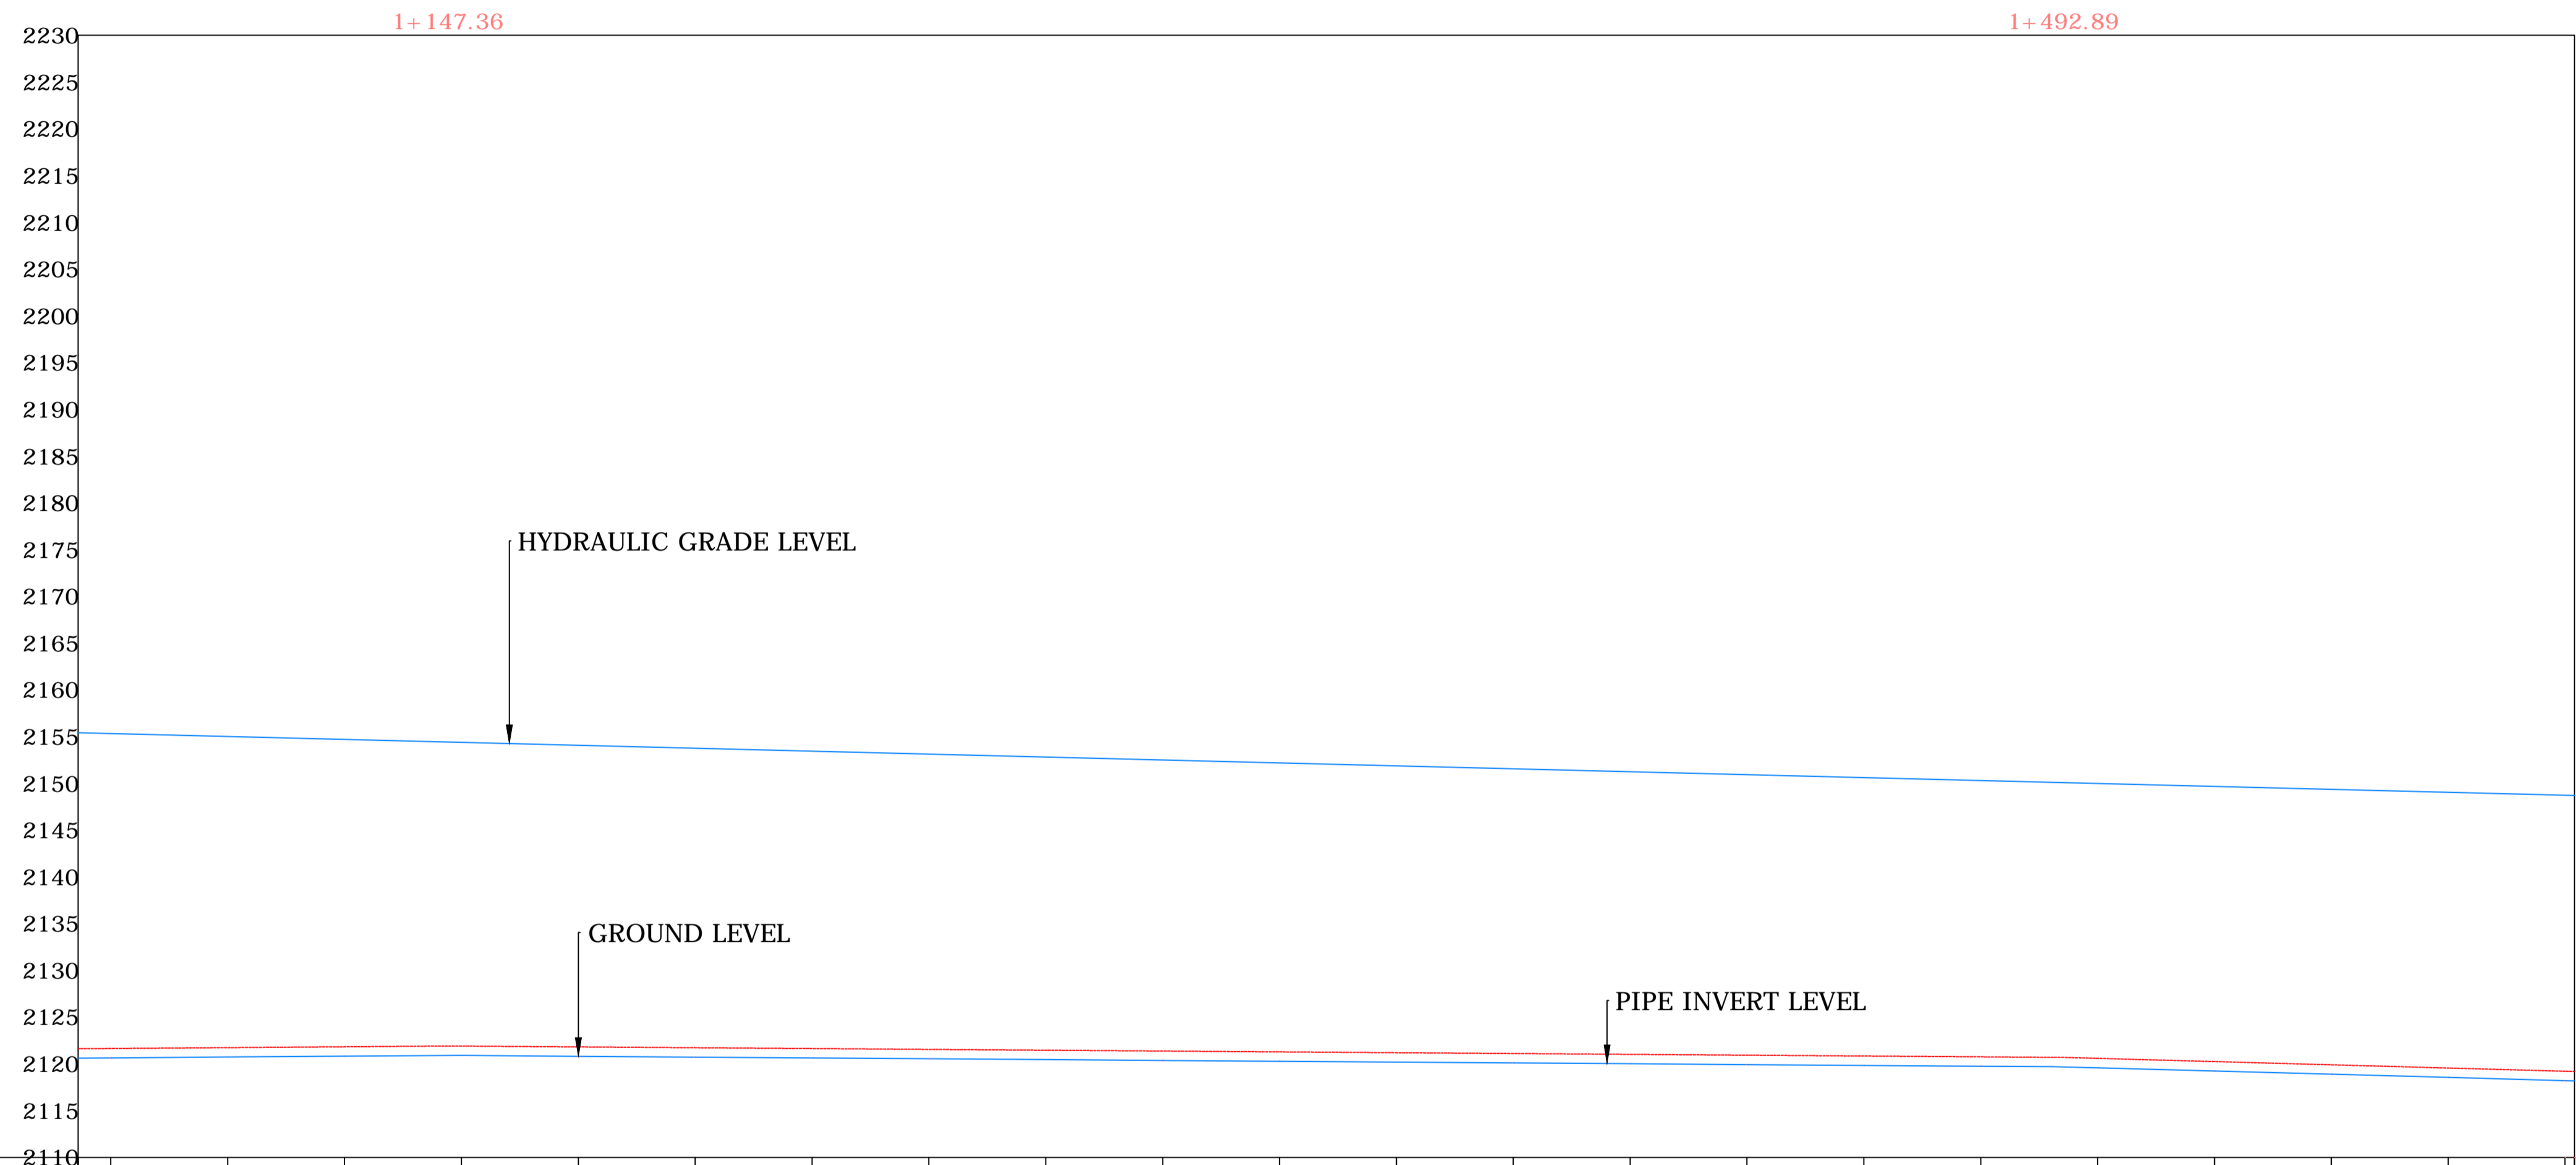


KIHIU MWIRI SUB- BRANCH PROFILE

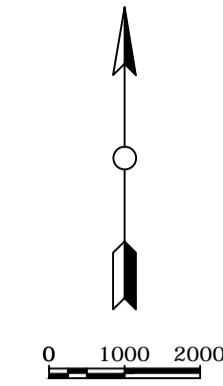

CHAINAGE	ELEVATION
1+068	2155.42
1+100	2155.02
1+200	2153.76
1+300	2152.50
1+400	2151.24
1+500	2149.98
1+600	2148.76

CHAINAGE	ORIGINAL GROUND LEVEL
1+068	2121.62
1+100	2121.74
1+200	2121.73
1+300	2121.38
1+400	2121.03
1+500	2120.60
1+600	2119.23

CHAINAGE	PIPE INVERT LEVEL
1+068	2120.62
1+100	2120.74
1+200	2120.73
1+300	2120.37
1+400	2120.02
1+500	2119.59
1+600	2118.19

CHAINAGE	HYDRAULIC GRADE LEVEL
1+068	2155.42
1+100	2154.71
1+200	2153.45
1+300	2152.82
1+400	2151.56
1+500	2149.87
1+600	2148.04

CHAINAGE	FLOW PARAMETERS
1+068 - 1+600	0.0046M ³ /S

CHAINAGE	PIPE INFO
1+068 - 1+600	UPVC PN 16 90MM

CHAINAGE	SURVEY REMARKS
1+068 - 1+600	

General Notes

No.	Revision/Issue	Date

Firm Name and Address

MINISTRY OF AGRICULTURE,
LIVESTOCK, FISHERIES & IRRIGATION
NATIONAL IRRIGATION BOARD
SURVEYED BY : VIRGINIA.W.
DRAWN BY : VIRGINIA.W.
DESIGNED BY : MR J.W.MUCHINA.
CHECKED BY : C.M.M.

Project Name and Address

NYAMUGUNA IRRIGATION
PROJECT
LAIKIPIA COUNTY
LAIKIPIA EAST SUB-COUNTY

Project	Sheet
KIHIU MWIRI BRANCH	3
Date	FEB.2019
Scale	1:1000