


KIHU MWIRI SUB- BRANCH PROFILE

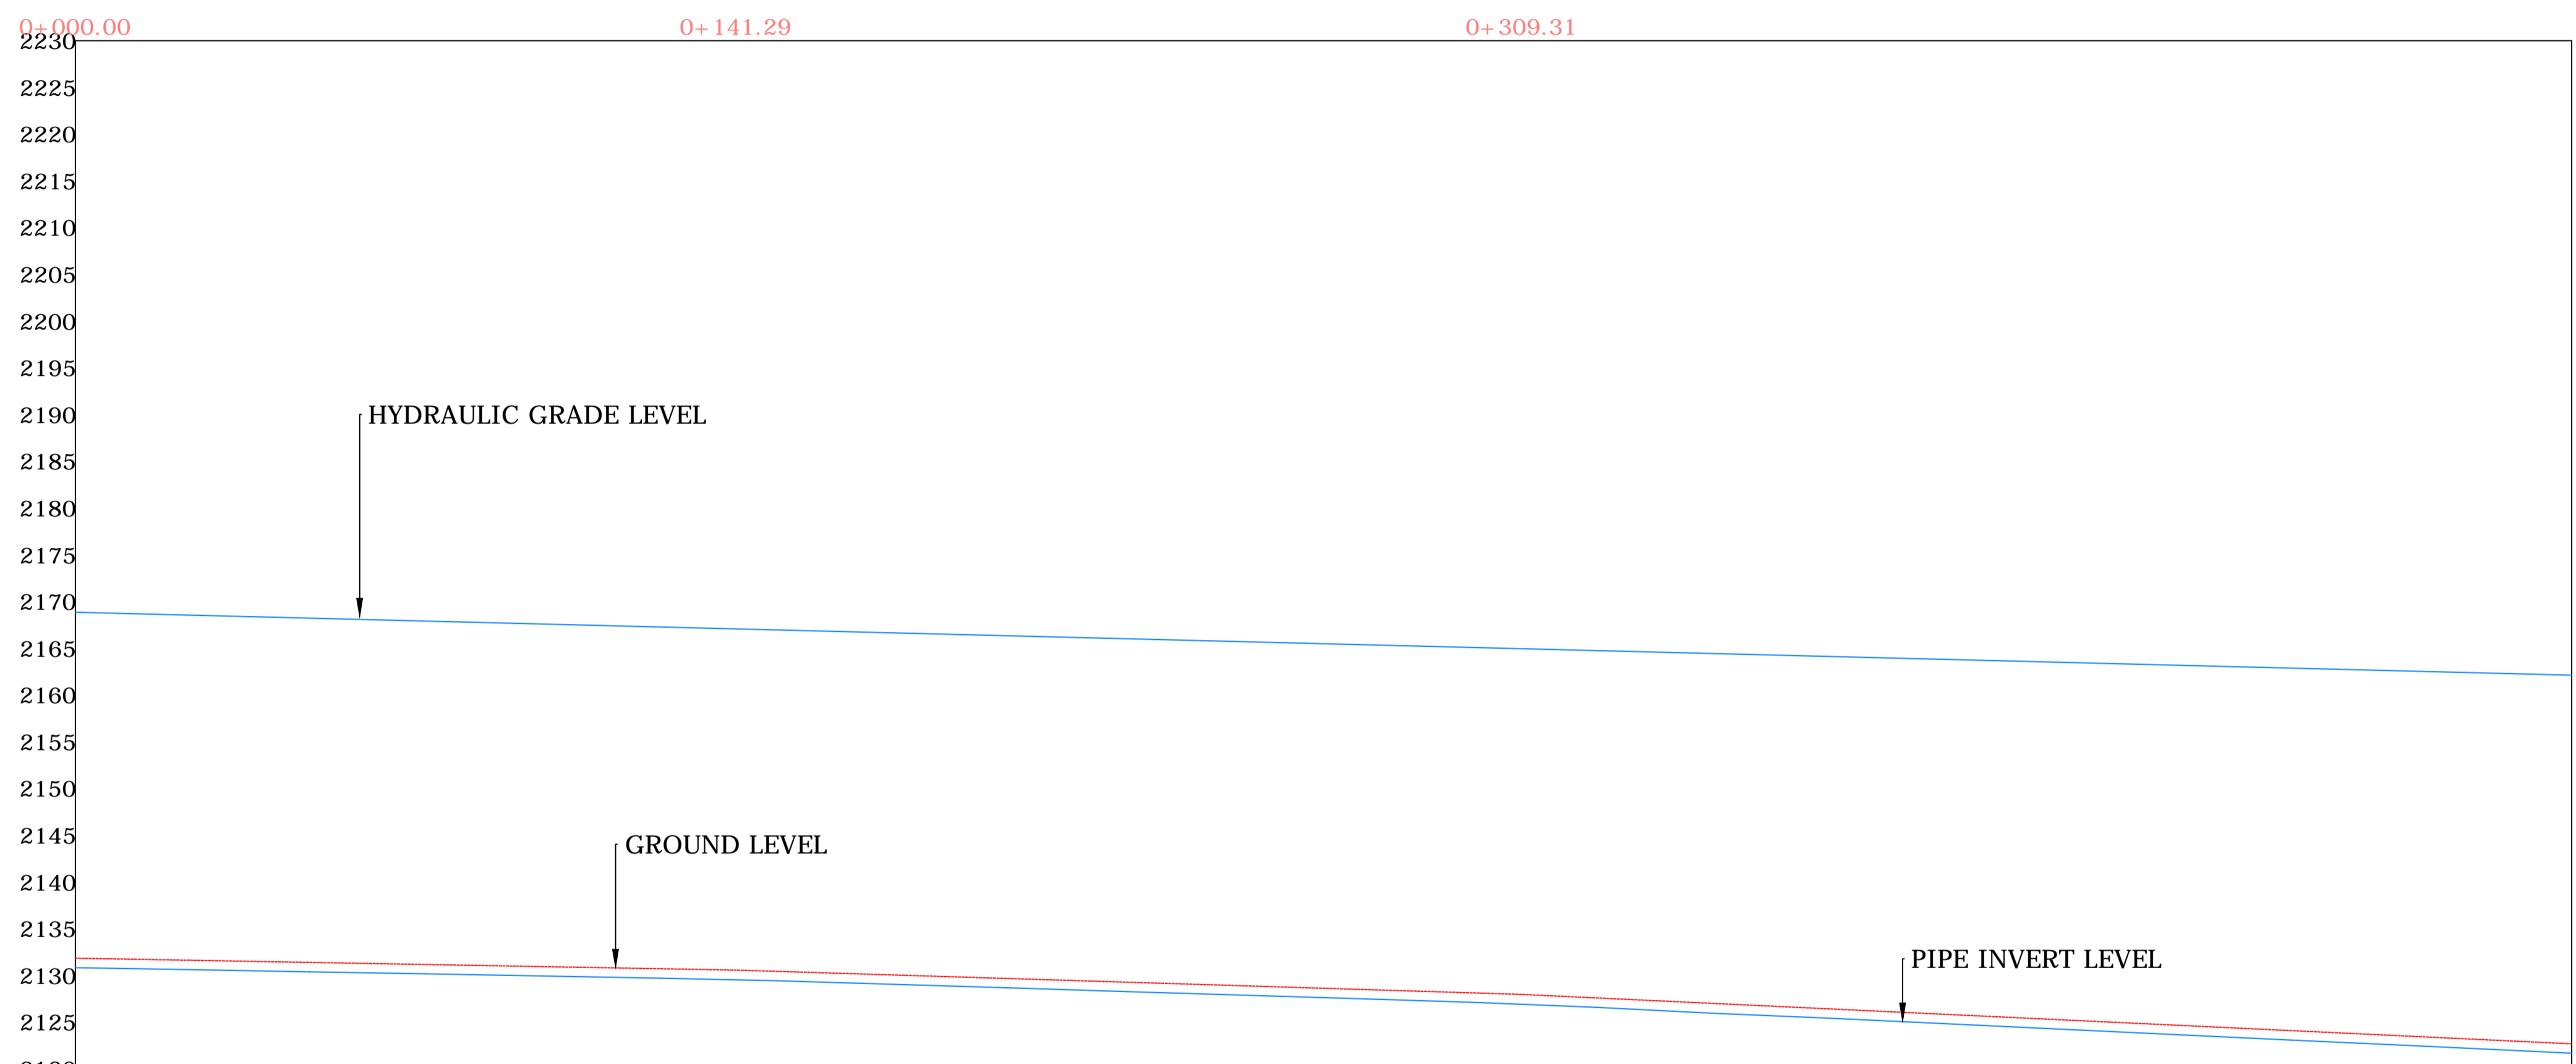

CHAINAGE	0+000.00	0+100.00	0+200.00	0+300.00	0+400.00	0+500.00	0+534.00
ORIGINAL GROUND LEVEL	2131.87	2131.65	2131.42	2131.20	2130.97	2130.75	2130.47
PIPE INVERT LEVEL	2130.87	2130.64	2130.42	2130.19	2129.97	2129.74	2129.46
HYDRAULIC GRADE LEVEL	2168.87	2168.56	2168.24	2167.93	2167.62	2167.30	2166.99
FLOW PARAMETERS	0.00652M ³ /S						
PIPE INFO	UPVC PN 16 90MM						
SURVEY REMARKS	Near Gathoni snowline farm Off chainage 4325 of Wamura branch						

No.	Revision/Issue	Date

Firm Name and Address
 MINISTRY OF AGRICULTURE,
 LIVESTOCK, FISHERIES&IRRIGATION
 NATIONAL IRRIGATION BOARD
 SURVEYED BY : VIRGINIA.W.
 DRAWN BY : VIRGINIA.W.
 DESIGNED BY : MR J.W.MUCHINA.
 CHECKED BY : C.M.M.

Project Name and Address
 NYAMUGUNA IRRIGATION
 PROJECT
 LAIKIPIA COUNTY
 LAIKIPIA EAST SUB-COUNTY

Project KIHU MWIRI BRANCH	Sheet 1
Date FEB.2019	
Scale 1:1000	