


# GITHIRA BRANCH PROFILE

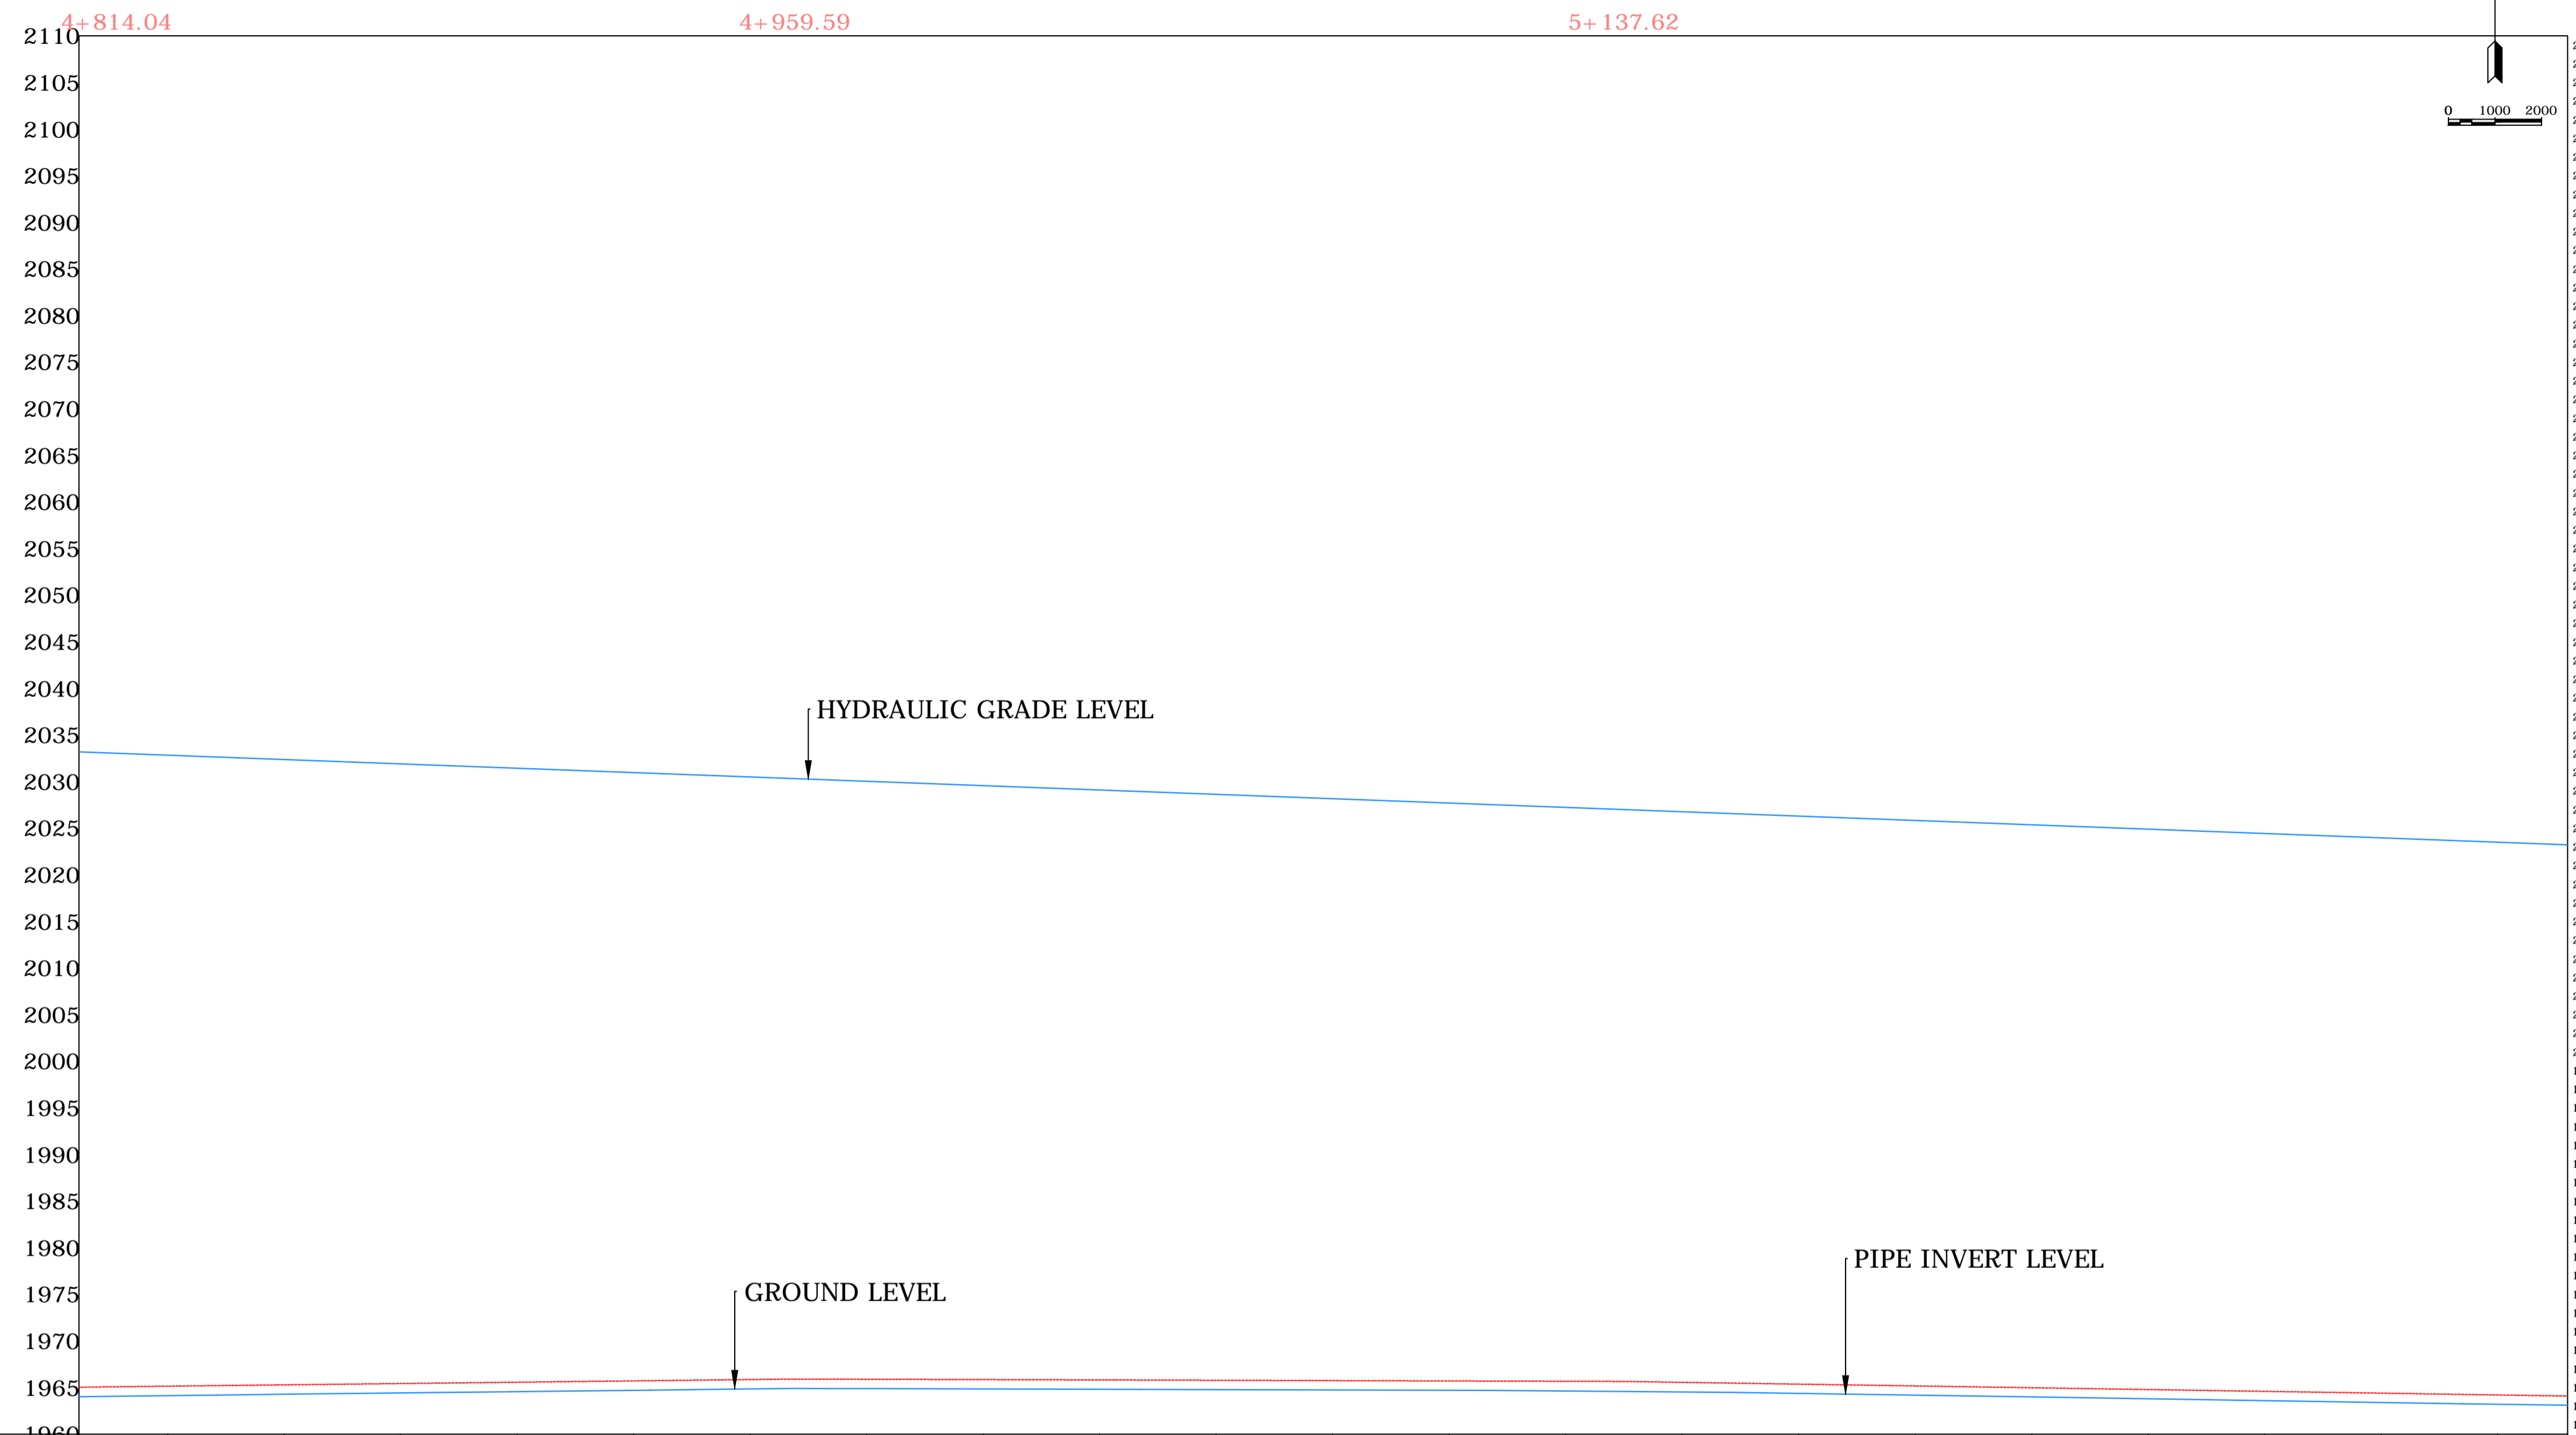

CHAINAGE	ELEVATION
ORIGINAL GROUND LEVEL	1965.04, 1965.15, 1965.29, 1965.43, 1965.57, 1965.71, 1965.86, 1965.89, 1965.85, 1965.82, 1965.78, 1965.74, 1965.71, 1965.67, 1965.56, 1965.36, 1965.17, 1964.98, 1964.78, 1964.59, 1964.40, 1964.20, 1964.09
PIPE INVERT LEVEL	1964.03, 1964.14, 1964.28, 1964.42, 1964.56, 1964.71, 1964.85, 1964.88, 1964.85, 1964.81, 1964.77, 1964.74, 1964.70, 1964.62, 1964.52, 1964.36, 1964.18, 1963.99, 1963.79, 1963.59, 1963.39, 1963.21, 1963.11
HYDRAULIC GRADE LEVEL	2033.18, 2032.83, 2032.36, 2031.90, 2031.43, 2030.97, 2030.50, 2030.03, 2029.57, 2029.10, 2028.63, 2028.17, 2027.70, 2027.24, 2026.77, 2026.30, 2025.84, 2025.37, 2024.91, 2024.44, 2023.97, 2023.51, 2023.23
FLOW PARAMETERS	0.00056M <sup>3</sup> /S
PIPE INFO	UPVC PN 16 32MM
SURVEY REMARKS	Ngatia Wathuta farm

General Notes

No.	Revision/Issue	Date

Firm Name and Address

MINISTRY OF AGRICULTURE,  
LIVESTOCK, FISHERIES & IRRIGATION  
NATIONAL IRRIGATION BOARD  
SURVEYED BY : VIRGINIA.W.  
DRAWN BY : VIRGINIA.W.  
DESIGNED BY : MR J.W.MUCHINA.  
CHECKED BY : C.M.M.

Project Name and Address

NYAMUGUNA IRRIGATION  
PROJECT  
LAIKIPIA COUNTY  
LAIKIPIA EAST SUB-COUNTY

Project GITHIRA BRANCH	Sheet 10
Date FEB.2019	
Scale 1:1000	